



Bubble Signs



*Not included but required for anchor installation and removal of side plate is a Phillips screwdriver.

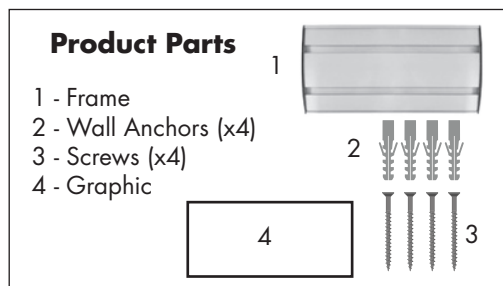

All available sizes are 6" in height

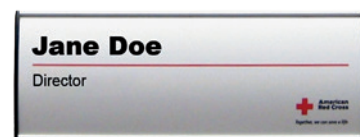

Display Set-Up

Step 1

Remove two screws from side plate. Set aside for later step.



Step 2

Slide out clear cover.



Step 3

Remove protective plastic film from clear cover on both sides. Tape can help with removal.



Step 4

Bubble Signs can be displayed many places. The Hardware provided is intended for securing to wood or wallboard. Pass supplied Screws (3) through holes in Frame (1) and tighten into provided Wall Anchors (2) or solid surface.



Step 5

Place Graphic (4) under clear cover and slide into Frame (1). Replace side plate and secure with screws removed in Step 1.

Optional mounting method:

Use double-sided tape or hook & loop (not included).

Care

To clean, wipe with damp cloth.